

remote engineer

Simply Connect and Control



PRODUCTSHEET

SERVICEGATE NANO





Description

What makes the ServiceGate Nano the best choice for you as system or machine manufacturer? Quite simply, it can save you time and money by enabling you to provide remote support with just a low investment. This industrial VPN router is, for instance, ideal for smaller machines or projects.



Specifications ServiceGate Nano

Processor	ATHEROS
RAM	64MB
Flash	16MB
Ethernet	1x Fast Ethernet (WAN) Ethernet (LAN) 1x Fast Ethernet (LAN) WiFi
USB	1x USB 2.0 front
Stroomvoorziening	8-48 VDC input


Physical

Dimensions (LxBxH)	80x35x100 mm
Weight	0,05kg
Montage	DIN Rail

Environmental variables

Operating temperature	-5 - +55°C
Storage temperature	-30 - +60°C
Certificates	CE Class A
Warranty	12 months

Specifications ServiceGate Nano

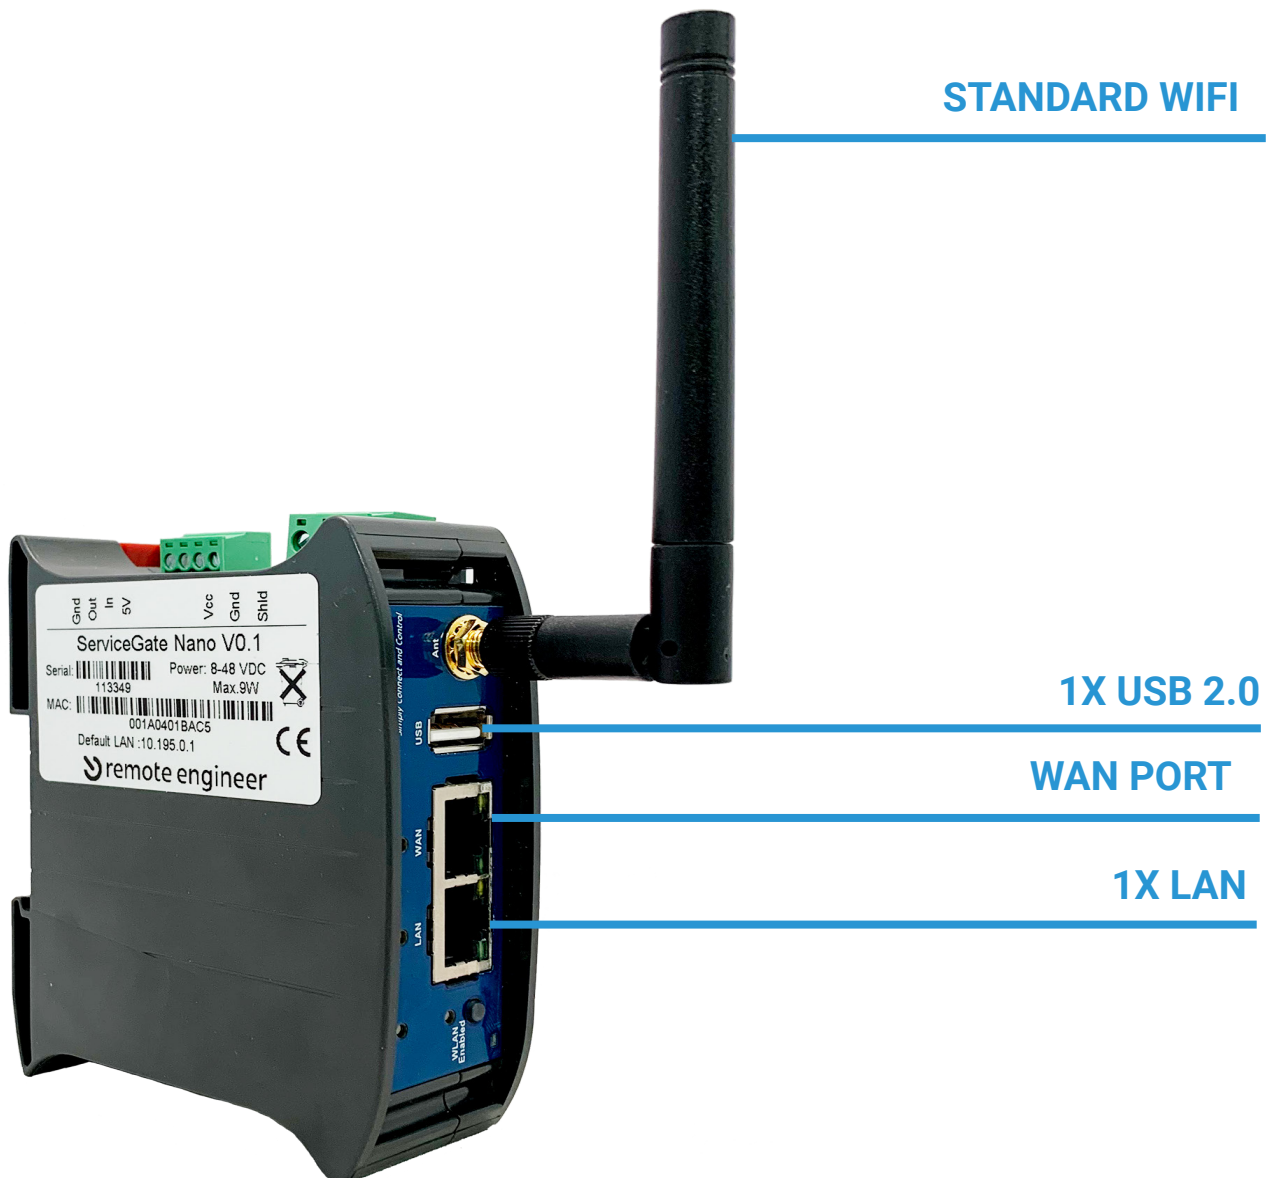

Specifications ServiceGate Nano



Specifications ServiceGate Nano



GPIO

Contact

If you'd like to find out more about the ServiceGate Nano and what Remote Engineer can do for you, simply get in touch with us.

Remote Engineer B.V.
It Vegelinskampke 11,
8491 PD Akkrum (NL)
www.remoteengineer.eu,
Tel: +31 566 796 515,
sales@remoteengineer.eu

Copyright © 2020 Remote Engineer B.V. All rights reserved





remote engineer
Simply Connect and Control